

## Low TCR 2ppm/°C~20ppm/°C Non-Inductive for Ultra Stable HV Calibration Sys.

3RLAB, Precision Flat type LTF-series ultra stable Low TCR, Low VCR, Especially for High Voltage Non-Inductive Divider Sets, HV Precision Measurements Systems, Available 0~000pcs connection in serial for HV Calibration Equipments upto 1000kVp.

## LTF Precision Low TCR High Voltage Resistors






Epoxy conformal full coat for excellent humidity protection Resistance tolerance offered : 0.1%, 0.3%, 0.5%

- \* Temperature Coefficient of Resistance:  
2ppm/°C, 3ppm/°C, 5ppm/°C, 7ppm/°C, 10ppm/°C  
20ppm/°C from -40°C to +85°C referenced to +25°C
- \* Load Life Stability of 0.015%, 0.025% & 0.05% per  
1000hours at rated Voltage
- \* Resistance range : 1 MΩ to 200MΩ
- \* Various Models related with Voltage Ratings from  
1kV to 15kV each in free air 60% humidity.






## DIMENSIONS[mm]

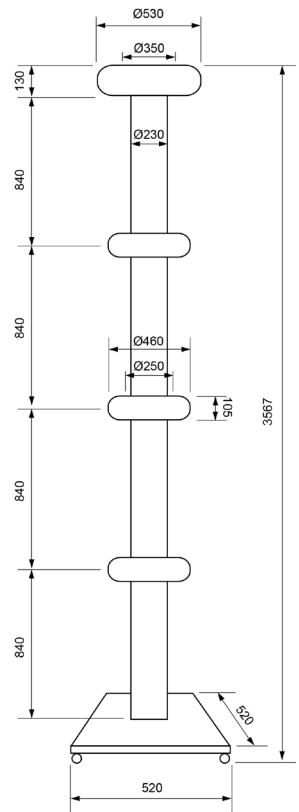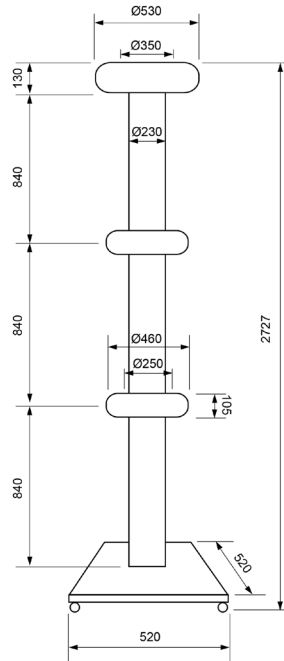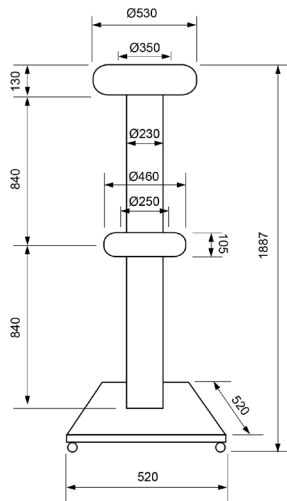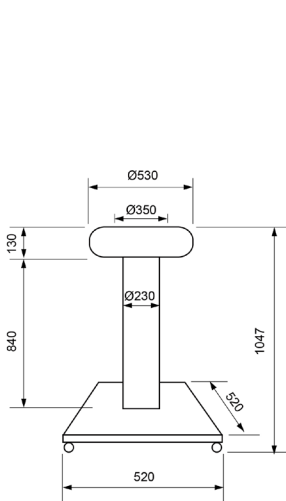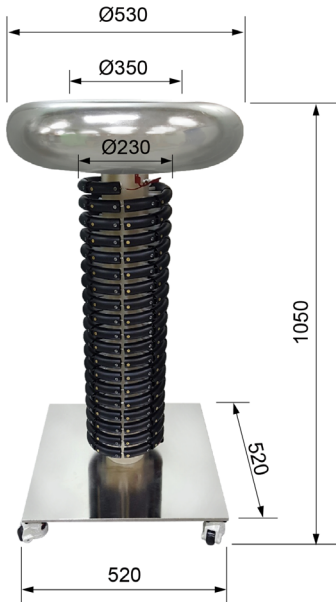



## ORDERING INFORMATION

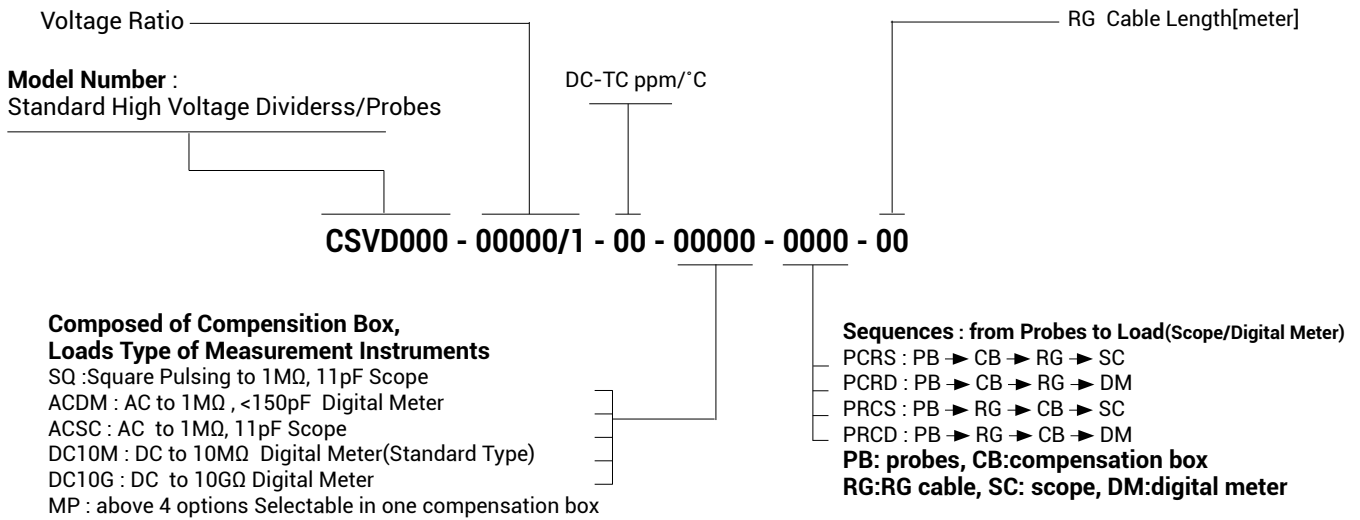

All of specifications Subject to change without prenotice.

ALL INFORMATION ON THIS FILE IS SUBJECT TO CHANGE WITHOUT PRE-NOTICE.



303 Hyundai I Valley, 149 Gongdanro, Gunpo City, Gyeonggi-do, Korea  
**VOICE.** +82-31-429-6379 **FAX.** +82-31-429-9127 **UPDATE** 2021-10-15  
 info@3RLab.com www.3RLab.com 3RLab,Inc.

