

BX7 HIGH DC FILM CAPACITORS



HIGH CURRENT AL FOIL FILM CAPACITORS IN PLASTIC CASE
AND EPOXY FILLING
CUSTOM DESIGN AVAILABLE

VOICE : +82-31-429-6379
FAX : +82-31-429-9127
E-MAIL : info@3RLab.com
UPDATE : 2021-10-14



MAIN CHARACTERISTICS:

- HIGH PULSE DUTY
- PLASTIC CASE AND EPOXY FILLING
- VERY LOW DISSIPATION FACTOR

MAIN APPLICATIONS:

- HIGH VOLTAGE, HIGH PULSE APPLICATIONS
- ENERGY CONVERSION AND CONTROL IN POWER SEMICONDUCTOR CIRCUITS
- SMPS, MOTOR SPEED CONTROLS , AUDIO



BX7 HIGH DC FILM CAPACITORS




HIGH CURRENT AL FOIL FILM CAPACITORS IN PLASTIC CASE
AND EPOXY FILLING
CUSTOM DESIGN AVAILABLE

VOICE : +82-31-429-6379
FAX : +82-31-429-9127
E-MAIL : info@3RLab.com
UPDATE : 2021-10-14

DC VOLTAGE RANGE	400 ~ 2000 V
CAPACITANCE RANGE	UP TO 6.8 μ F
CAPACITANCE TOLERANCE (+25°C)	STANDARD: \pm 10%. CUSTOM: \pm 5%, \pm 3%
SERIES RESISTANCE	< 4.5 m Ω
MAXIMUM VOLTAGE RATE OF RISE(dV/dT)	\leq 9000 V/ μ s
TERMINALS	TINNED COPPER WIRE
VOLTAGE TEST	RATED VOLTAGE X 1.5 TIMES FOR 10 SECS
WORKING & STORAGE TEMPERATURE	-55 / +85 °C
FILLING	FLAME RETARDANT EPOXY RESIN FILLING
PROTECTIVE MECHANISM	SELF HEALING
SQUARE PLASTIC CASE	V
LIFE EXPECTANCY	100,000 HOURS TYP.
SOLDERING HEAT TEST	TEMPERATURE = 260 \pm 5°C FOR 10SECS
DISSIPATION FACTOR	DF VALUE \leq 1 % , MEASURED AT 25 \pm 5°C, 1 kHz

ORDERING INFORMATION

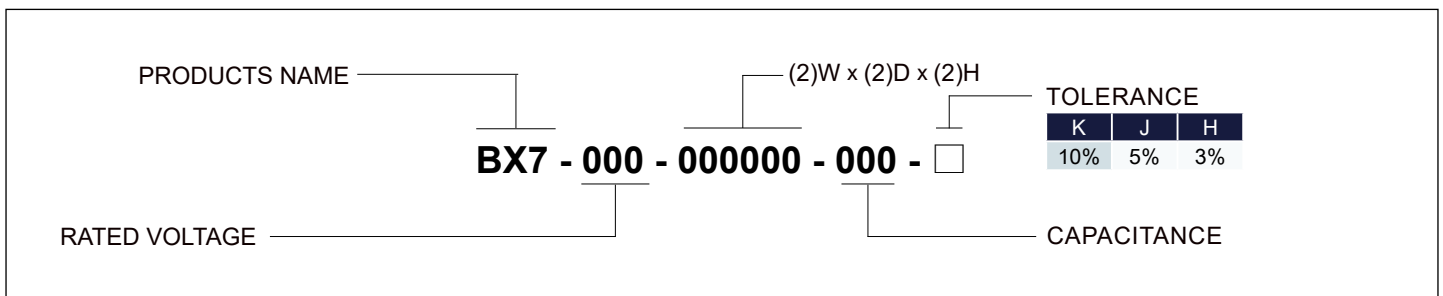


ALL OF SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRENOTICE.

BX7 HIGH DC FILM CAPACITORS

HIGH CURRENT AL FOIL FILM CAPACITORS IN PLASTIC CASE
AND EPOXY FILLING
CUSTOM DESIGN AVAILABLE

VOICE : +82-31-429-6379
FAX : +82-31-429-9127
E-MAIL : info@3RLab.com
UPDATE : 2021-10-14

DIEMENSION[mm]

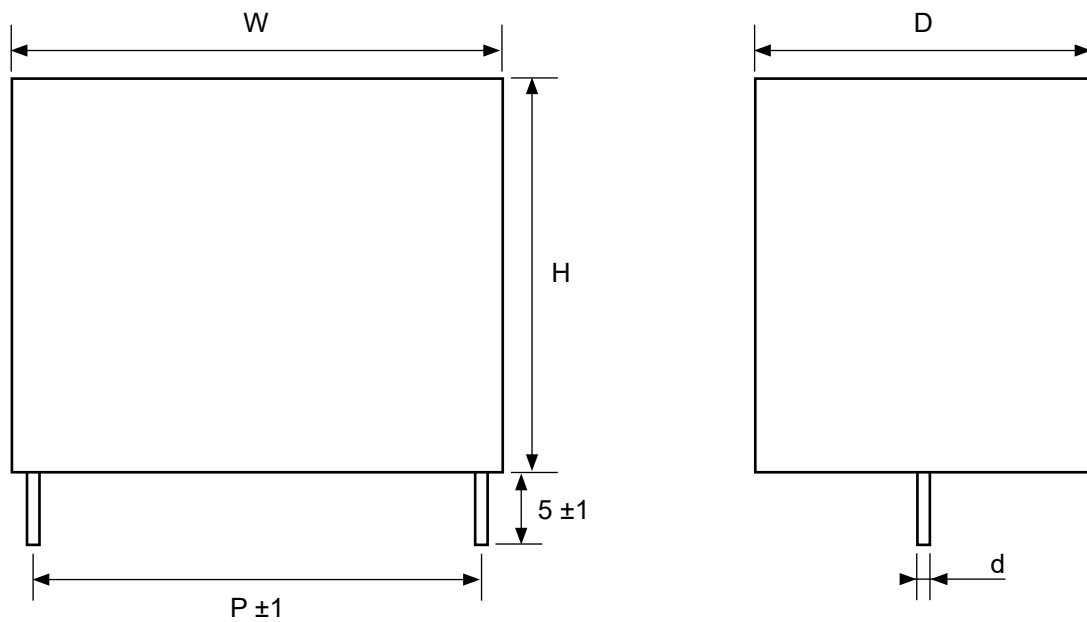

HIGH CURRENT AL FOIL FILM CAPACITORS IN PLASTIC CASE
AND EPOXY FILLING
CUSTOM DESIGN AVAILABLE

VOICE : +82-31-429-6379
FAX : +82-31-429-9127
E-MAIL : info@3RLab.com
UPDATE : 2021-10-14

400VDC, RATED VOLTAGE

VOLTAGE AT +125°C			CAP ⁽³⁾ μF	DIMENSIONS [mm]					LEAD	CURRENT	ORDERING CODE
VDC	VRMS (VAC)	V -PEAK ⁽¹⁾		D	H	W	P	d	AWG	I-PEAK ⁽²⁾ [A]	
400	250	560	0.1	15	24	32	27.5	0.8	20	600	BX7-040-152432-104-K
400	250	560	0.15	15	24	32	27.5	0.8	20	900	BX7-040-152432-154-K
400	250	560	0.22	15	24	32	27.5	0.8	20	1320	BX7-040-152432-224-K
400	250	560	0.33	18	33	32	27.5	0.8	20	990	BX7-040-183332-334-K
400	250	560	0.47	18	33	32	27.5	0.8	20	1410	BX7-040-183332-474-K
400	250	560	0.68	20	39.5	41.5	37.5	1	18	2040	BX7-040-203941-684-K
400	250	560	1	20	39.5	41.5	37.5	1	18	1000	BX7-040-203941-105-K
400	250	560	1.2	20	39.5	41.5	37.5	1	18	1200	BX7-040-203941-125-K
400	250	560	1.5	34	36	45	37.5	1	18	1500	BX7-040-343645-155-K
400	250	560	2	34	45	45	37.5	1	18	2000	BX7-040-344545-205-K
400	250	560	2.2	34	45	45	37.5	1	18	2200	BX7-040-344545-225-K
400	250	560	2.5	34	45	45	37.5	1	18	2500	BX7-040-344545-255-K
400	250	560	3	42	47	45	37.5	1	18	3000	BX7-040-424745-305-K
400	250	560	3.3	42	47	45	37.5	1	18	3300	BX7-040-424745-335-K
400	250	560	4	35	50	57	52.5	1.2	16	4000	BX7-040-355057-405-K
400	250	560	4.7	35	50	57	52.5	1.2	16	4700	BX7-040-355057-475-K
400	250	560	5	35	50	57	52.5	1.2	16	3000	BX7-040-355057-505-K
400	250	560	5.5	38	54	57	52.5	1.2	16	3300	BX7-040-385457-555-K
400	250	560	6	38	54	57	52.5	1.2	16	3600	BX7-040-385457-605-K

**CAPACITANCE AND THREADS TERMINAL AVAILABLE AS CUSTOM.

(1) NON-REPETITIVE PEAK VOLTAGE LESS THAN 00μS TYP.

(2) NON-REPETITIVE PEAK CURRENT LESS THAN 00μS TYP.

(3) MEASURED AT 1kHz ±20Hz AT 25°C

HIGH CURRENT AL FOIL FILM CAPACITORS IN PLASTIC CASE
AND EPOXY FILLING
CUSTOM DESIGN AVAILABLE

VOICE : +82-31-429-6379
FAX : +82-31-429-9127
E-MAIL : info@3RLab.com
UPDATE : 2021-10-14

400VDC, RATED VOLTAGE

VOLTAGE AT +125°C			CAP ⁽³⁾ μF	DIMENSIONS [mm]					LEAD	CURRENT	ORDERING CODE
VDC	VRMS (VAC)	V -PEAK ⁽¹⁾		D	H	W	P	d	AWG	I-PEAK ⁽²⁾ [A]	
400	250	560	6.8	50	55	57	52.5	1.2	16	4080	BX7-040-505557-685-K

630VDC, RATED VOLTAGE

630	350	880	0.1	15	24	32	27.5	0.8	20	900	BX7-063-152432-104-K
630	350	880	0.15	15	24	32	27.5	0.8	20	1350	BX7-063-152432-154-K
630	350	880	0.22	15	24	32	27.5	0.8	20	1980	BX7-063-152432-224-K
630	350	880	0.33	18	33	32	27.5	0.8	20	1650	BX7-063-183332-334-K
630	350	880	0.47	20	39.5	41.5	37.5	1	18	2350	BX7-063-203941-474-K
630	350	880	0.68	20	39.5	41.5	37.5	1	18	3400	BX7-063-203941-684-K
630	350	880	1	20	39.5	41.5	37.5	1	18	1600	BX7-063-203941-105-K
630	350	880	1.2	34	36	45	37.5	1	18	1920	BX7-063-343645-125-K
630	350	880	1.5	34	36	45	37.5	1	18	2400	BX7-063-343645-155-K
630	350	880	2	34	45	45	37.5	1	18	3200	BX7-063-344545-205-K
630	350	880	2.2	34	45	45	37.5	1	18	3520	BX7-063-344545-225-K
630	350	880	2.5	42	47	45	37.5	1	18	4000	BX7-063-424745-255-K
630	350	880	3	35	50	57	52.5	1.2	16	4800	BX7-063-355057-305-K
630	350	880	3.3	35	50	57	52.5	1.2	16	5280	BX7-063-355057-335-K
630	350	880	4	35	50	57	52.5	1.2	16	6400	BX7-063-355057-405-K
630	350	880	4.7	35	50	57	52.5	1.2	16	7520	BX7-063-355057-475-K
630	350	880	5	38	54	57	52.5	1.2	16	4000	BX7-063-385457-505-K

**CAPACITANCE AND THREADS TERMINAL AVAILABLE AS CUSTOM.

(1) NON-REPETITIVE PEAK VOLTAGE LESS THAN 00μS TYP.

(2) NON-REPETITIVE PEAK CURRENT LESS THAN 00μS TYP.

(3) MEASURED AT 1kHz ±20Hz AT 25°C

HIGH CURRENT AL FOIL FILM CAPACITORS IN PLASTIC CASE
AND EPOXY FILLING
CUSTOM DESIGN AVAILABLE

VOICE : +82-31-429-6379
FAX : +82-31-429-9127
E-MAIL : info@3RLab.com
UPDATE : 2021-10-14

630VDC, RATED VOLTAGE

VOLTAGE AT +125°C			CAP ⁽³⁾ μF	DIMENSIONS [mm]					LEAD	CURRENT	ORDERING CODE
VDC	VRMS (VAC)	V -PEAK ⁽¹⁾		D	H	W	P	d	AWG	I-PEAK ⁽²⁾ [A]	
630	350	880	5.5	38	54	57	52.5	1.2	16	4400	BX7-063-385457-555-K
630	350	880	6	50	55	57	52.5	1.2	16	4800	BX7-063-505557-605-K
630	350	880	6.8	50	55	57	52.5	1.2	16	5440	BX7-063-505557-685-K

850VDC, RATED VOLTAGE

850	380	1200	0.1	15	24	32	27.5	0.8	20	900	BX7-085-152432-104-K
850	380	1200	0.15	15	24	32	27.5	0.8	20	1350	BX7-085-152432-154-K
850	380	1200	0.22	15	24	32	27.5	0.8	20	1980	BX7-085-152432-224-K
850	380	1200	0.33	18	33	32	27.5	0.8	20	1650	BX7-085-183332-334-K
850	380	1200	0.47	20	39.5	41.5	37.5	1	18	2350	BX7-085-203941-474-K
850	380	1200	0.68	20	39.5	41.5	37.5	1	18	3400	BX7-085-203941-684-K
850	380	1200	1	20	39.5	41.5	37.5	1	18	1600	BX7-085-203941-105-K
850	380	1200	1.2	34	36	45	37.5	1	18	1920	BX7-085-343645-125-K
850	380	1200	1.5	34	36	45	37.5	1	18	2400	BX7-085-343645-155-K
850	380	1200	2	34	45	45	37.5	1	18	3200	BX7-085-344545-205-K
850	380	1200	2.2	34	45	45	37.5	1	18	3520	BX7-085-344545-225-K
850	380	1200	2.5	42	47	45	37.5	1	18	4000	BX7-085-424745-255-K
850	380	1200	3	35	50	57	52.5	1.2	16	4800	BX7-085-355057-305-K
850	380	1200	3.3	35	50	57	52.5	1.2	16	5280	BX7-085-355057-335-K
850	380	1200	4	35	50	57	52.5	1.2	16	6400	BX7-085-355057-405-K

**CAPACITANCE AND THREADS TERMINAL AVAILABLE AS CUSTOM.

(1) NON-REPETITIVE PEAK VOLTAGE LESS THAN 00μS TYP.

(2) NON-REPETITIVE PEAK CURRENT LESS THAN 00μS TYP.

(3) MEASURED AT 1kHz ±20Hz AT 25°C

HIGH CURRENT AL FOIL FILM CAPACITORS IN PLASTIC CASE
AND EPOXY FILLING
CUSTOM DESIGN AVAILABLE

VOICE : +82-31-429-6379
FAX : +82-31-429-9127
E-MAIL : info@3RLab.com
UPDATE : 2021-10-14

850VDC, RATED VOLTAGE

VOLTAGE AT +125°C			CAP ⁽³⁾ μF	DIMENSIONS [mm]					LEAD AWG	CURRENT I-PEAK ⁽²⁾ [A]	ORDERING CODE
VDC	VRMS (VAC)	V -PEAK ⁽¹⁾		D	H	W	P	d			
850	380	1200	4.7	35	50	57	52.5	1.2	16	7520	BX7-085-355057-475-K
850	380	1200	5	38	54	57	52.5	1.2	16	4000	BX7-085-385457-505-K
850	380	1200	5.5	38	54	57	52.5	1.2	16	4400	BX7-085-385457-555-K
850	380	1200	6	50	55	57	52.5	1.2	16	4800	BX7-085-505557-605-K
850	380	1200	6.8	50	55	57	52.5	1.2	16	5440	BX7-085-505557-685-K

1000VDC, RATED VOLTAGE

1000	400	1400	0.068	15	24	32	27.5	0.8	20	612	BX7-100-152432-683-K
1000	400	1400	0.1	15	24	32	27.5	0.8	20	900	BX7-100-152432-104-K
1000	400	1400	0.15	15	24	32	27.5	0.8	20	1350	BX7-100-152432-154-K
1000	400	1400	0.22	18	33	32	27.5	0.8	20	1980	BX7-100-183332-224-K
1000	400	1400	0.33	20	39.5	41.5	37.5	1	18	1650	BX7-100-203941-334-K
1000	400	1400	0.47	20	39.5	41.5	37.5	1	18	2350	BX7-100-203941-474-K
1000	400	1400	0.68	20	39.5	41.5	37.5	1	18	3400	BX7-100-203941-684-K
1000	400	1400	1	34	36	45	37.5	1	18	2000	BX7-100-343645-105-K
1000	400	1400	1.2	34	36	45	37.5	1	18	2400	BX7-100-343645-125-K
1000	400	1400	1.5	34	45	45	37.5	1	18	3000	BX7-100-344545-155-K
1000	400	1400	2	42	47	45	37.5	1	18	4000	BX7-100-424745-205-K
1000	400	1400	2.2	35	50	57	52.5	1.2	16	4400	BX7-100-355057-225-K
1000	400	1400	2.5	35	50	57	52.5	1.2	16	5000	BX7-100-355057-255-K

**CAPACITANCE AND THREADS TERMINAL AVAILABLE AS CUSTOM.

(1) NON-REPETITIVE PEAK VOLTAGE LESS THAN 00μS TYP.

(2) NON-REPETITIVE PEAK CURRENT LESS THAN 00μS TYP.

(3) MEASURED AT 1kHz ±20Hz AT 25°C

HIGH CURRENT AL FOIL FILM CAPACITORS IN PLASTIC CASE
AND EPOXY FILLING
CUSTOM DESIGN AVAILABLE

VOICE : +82-31-429-6379
FAX : +82-31-429-9127
E-MAIL : info@3RLab.com
UPDATE : 2021-10-14

1000VDC, RATED VOLTAGE

VOLTAGE AT +125°C			CAP ⁽³⁾ μF	DIMENSIONS [mm]					LEAD AWG	CURRENT I-PEAK ⁽²⁾ [A]	ORDERING CODE
VDC	VRMS (VAC)	V -PEAK ⁽¹⁾		D	H	W	P	d			
1000	400	1400	3	35	50	57	52.5	1.2	16	6000	BX7-100-355057-305-K
1000	400	1400	3.3	38	54	57	52.5	1.2	16	6600	BX7-100-385457-335-K
1000	400	1400	4	38	54	57	52.5	1.2	16	8000	BX7-100-385457-405-K
1000	400	1400	5	50	55	57	52.5	1.2	16	5000	BX7-100-505557-505-K

1250VDC, RATED VOLTAGE

1250	450	1750	0.047	15	24	32	27.5	0.8	20	423	BX7-125-152432-473-K
1250	450	1750	0.068	15	24	32	27.5	0.8	20	612	BX7-125-152432-683-K
1250	450	1750	0.1	15	24	32	27.5	0.8	20	900	BX7-125-152432-104-K
1250	450	1750	0.15	15	24	32	27.5	0.8	20	1350	BX7-125-152432-154-K
1250	450	1750	0.22	18	33	32	27.5	0.8	20	1980	BX7-125-183332-224-K
1250	450	1750	0.33	20	39.5	41.5	37.5	1	18	1650	BX7-125-203941-334-K
1250	450	1750	0.47	20	39.5	41.5	37.5	1	18	2350	BX7-125-203941-474-K
1250	450	1750	0.68	34	36	45	37.5	1	18	3400	BX7-125-343645-684-K
1250	450	1750	1	34	45	45	37.5	1	18	2000	BX7-125-344545-105-K
1250	450	1750	1.2	34	45	45	37.5	1	18	2400	BX7-125-344545-125-K
1250	450	1750	1.5	42	47	45	37.5	1	18	3000	BX7-125-424745-155-K
1250	450	1750	2	35	50	57	52.5	1.2	16	4000	BX7-125-355057-205-K
1250	450	1750	2.2	35	50	57	52.5	1.2	16	4400	BX7-125-355057-225-K
1250	450	1750	2.5	38	54	57	52.5	1.2	16	5000	BX7-125-385457-255-K

**CAPACITANCE AND THREADS TERMINAL AVAILABLE AS CUSTOM.

(1) NON-REPETITIVE PEAK VOLTAGE LESS THAN 00μS TYP.

(2) NON-REPETITIVE PEAK CURRENT LESS THAN 00μS TYP.

(3) MEASURED AT 1kHz ±20Hz AT 25°C

HIGH CURRENT AL FOIL FILM CAPACITORS IN PLASTIC CASE
AND EPOXY FILLING
CUSTOM DESIGN AVAILABLE

VOICE : +82-31-429-6379
FAX : +82-31-429-9127
E-MAIL : info@3RLab.com
UPDATE : 2021-10-14

1250VDC, RATED VOLTAGE

VOLTAGE AT +125°C			CAP ⁽³⁾ μF	DIMENSIONS [mm]					LEAD AWG	CURRENT I-PEAK ⁽²⁾ [A]	ORDERING CODE
VDC	VRMS (VAC)	V -PEAK ⁽¹⁾		D	H	W	P	d			
1250	450	1750	3	38	54	57	52.5	1.2	16	6000	BX7-125-385457-305-K
1250	450	1750	3.3	50	55	57	52.5	1.2	16	6600	BX7-125-505557-335-K
1250	450	1750	4	50	55	57	52.5	1.2	16	8000	BX7-125-505557-405-K

1600VDC, RATED VOLTAGE

1600	650	2250	0.033	15	24	32	27.5	0.8	20	297	BX7-160-152432-333-K
1600	650	2250	0.047	15	24	32	27.5	0.8	20	423	BX7-160-152432-473-K
1600	650	2250	0.068	15	24	32	27.5	0.8	20	612	BX7-160-152432-683-K
1600	650	2250	0.1	18	33	32	27.5	0.8	20	900	BX7-160-183332-104-K
1600	650	2250	0.15	20	39.5	41.5	37.5	1	18	1350	BX7-160-203941-154-K
1600	650	2250	0.22	20	39.5	41.5	37.5	1	18	1980	BX7-160-203941-224-K
1600	650	2250	0.33	20	39.5	41.5	37.5	1	18	1650	BX7-160-203941-334-K
1600	650	2250	0.47	34	36	45	37.5	1	18	2350	BX7-160-343645-474-K
1600	650	2250	0.68	34	45	45	37.5	1	18	3400	BX7-160-344545-684-K
1600	650	2250	1	35	50	57	52.5	1.2	16	2000	BX7-160-355057-105-K
1600	650	2250	1.2	35	50	57	52.5	1.2	16	2400	BX7-160-355057-125-K
1600	650	2250	1.5	38	54	57	52.5	1.2	16	3000	BX7-160-385457-155-K
1600	650	2250	2	50	55	57	52.5	1.2	16	4000	BX7-160-505557-205-K

**CAPACITANCE AND THREADS TERMINAL AVAILABLE AS CUSTOM.

(1) NON-REPETITIVE PEAK VOLTAGE LESS THAN 00μS TYP.

(2) NON-REPETITIVE PEAK CURRENT LESS THAN 00μS TYP.

(3) MEASURED AT 1kHz ±20Hz AT 25°C

HIGH CURRENT AL FOIL FILM CAPACITORS IN PLASTIC CASE
AND EPOXY FILLING
CUSTOM DESIGN AVAILABLE

VOICE : +82-31-429-6379
FAX : +82-31-429-9127
E-MAIL : info@3RLab.com
UPDATE : 2021-10-14

2000VDC, RATED VOLTAGE

VOLTAGE AT +125°C			CAP ⁽³⁾ μF	DIMENSIONS [mm]					LEAD	CURRENT	ORDERING CODE
VDC	VRMS (VAC)	V -PEAK ⁽¹⁾		D	H	W	P	d	AWG	I-PEAK ⁽²⁾ [A]	
2000	700	2800	0.022	15	24	32	27.5	0.8	20	198	BX7-200-152432-223-K
2000	700	2800	0.033	15	24	32	27.5	0.8	20	297	BX7-200-152432-333-K
2000	700	2800	0.047	15	24	32	27.5	0.8	20	423	BX7-200-152432-473-K
2000	700	2800	0.068	18	33	32	27.5	0.8	20	612	BX7-200-183332-683-K
2000	700	2800	0.1	20	39.5	41.5	37.5	1	18	900	BX7-200-203941-104-K
2000	700	2800	0.15	20	39.5	41.5	37.5	1	18	1350	BX7-200-203941-154-K
2000	700	2800	0.22	20	39.5	41.5	37.5	1	18	1980	BX7-200-203941-224-K
2000	700	2800	0.33	34	36	45	37.5	1	18	1650	BX7-200-343645-334-K
2000	700	2800	0.47	34	45	45	37.5	1	18	2350	BX7-200-344545-474-K
2000	700	2800	0.68	35	50	57	52.5	1.2	16	3400	BX7-200-355057-684-K
2000	700	2800	1	35	50	57	52.5	1.2	16	2000	BX7-200-355057-105-K
2000	700	2800	1.2	38	54	57	52.5	1.2	16	2400	BX7-200-385457-125-K
2000	700	2800	1.5	50	55	57	52.5	1.2	16	3000	BX7-200-505557-155-K

**CAPACITANCE AND THREADS TERMINAL AVAILABLE AS CUSTOM.

(1) NON-REPETITIVE PEAK VOLTAGE LESS THAN 00μS TYP.

(2) NON-REPETITIVE PEAK CURRENT LESS THAN 00μS TYP.

(3) MEASURED AT 1kHz ±20Hz AT 25°C

ALL INFORMATION ON THIS FILE IS SUBJECT TO CHANGE WITHOUT PRE-NOTICE.